



## INSTRUCTION MANUAL FOR BRUDER "FORTIS" CHRONOGRAPH CALIBER NO. 0S20/0S2A

CHRONOGRAPH FUNCTION: CENTRE SECOND HAND CHRONOGRAPH 1/1 sec.

Timing up to 59 minutes 59 seconds

BATTERY: SR927W SONY

---

### A) DISPLAY AND BUTTONS


#### B) SETTING THE TIME

#### C) SETTING THE DATE

#### D) USING THE CHRONOGRAPH

#### E) CHRONOGRAPH RESET (INCL. AFTER REPLACING BATTERY)

### A) DISPLAY AND BUTTONS

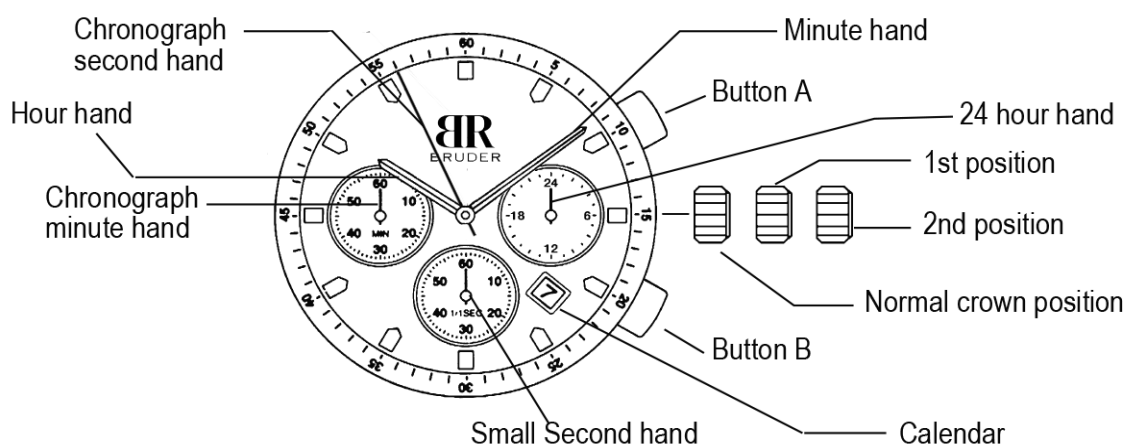

### B) SETTING THE TIME

1. Pull the crown out to the 2nd position.
2. Turn the crown to set the hour and minute hands.
3. When the crown is pushed back to the normal position, the small second hand begins to turn.

### C) SETTING THE DATE

1. Pull the crown out to the 1st position.
2. Turn the crown counter-clockwise to set the date. Note: If the date is set between the hours of around 9.00 PM and 1.00 AM, the date may not change on the following day.
3. After the date has been set, push the crown back to the normal position.

## D) USING THE CHRONOGRAPH

This chronograph is able to measure and display time in 1 second intervals up to a maximum of 59 minutes and 59 seconds. The chronograph second hand will move continuously for 59 minutes and 59 seconds after starting.

Measuring time with the chronograph:

1. The chronograph can be started and stopped each time button "A" is pressed.
2. Pressing button "B" resets the chronograph, the second hand and chronograph minute hand return to the zero position.



## E) CHRONOGRAPH RESET (INCL. AFTER REPLACING BATTERY)

This procedure should be performed when the chronograph second hand does not return to the zero position after the chronograph has been reset, for example after the battery has been replaced.

1. Pull the crown out to the 2nd position.
2. Press button "A" to set the chronograph second hand to the zero position. The chronograph hand can be advanced rapidly by continuously pressing button "A".
3. Once the hands have returned to zero, return the crown to the normal position.

\* Do not push the crown to the normal position while the chronograph second hand returns to the zero position. It stops when the crown is returned to its normal position and its position is recognised as the zero position.

**#WELCOME TO THE BRUDERHOOD**